

# Installation Instructions

## Surface Fixed

Cattail (6)  
Page 1 of 1



### Components:



x6  
M10x30 Security Screw




x4  
2 Part Cover Cap



x1  
TX40x25mm Driver Bit

Metric Conversion:  
1661mm/ 66 2/5"

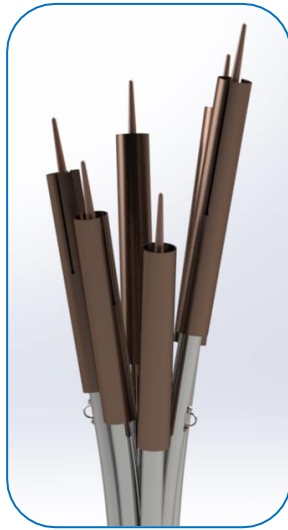

Weight of heaviest part **8Kg** (Large Bell)

**1.** Lay packaging out on floor and clear workspace with non-abrasive surface for assembly to prevent marking of polished stainless steel.

**2.** Unpack Cattail Chimes and Surface Fixing Plate.


**3.** Sheath the shortest chime (A4) over the front surface plate stanchion and secure with an M10x30mm Security Screw.

**4.** Repeat clockwise in ascending order of post height.


**5.** Secure instrument to the floor using recommended ground fixing anchors (not supplied), covering with M10 cover caps.



Small Beaters X4

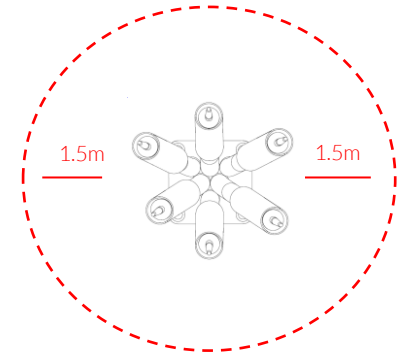

Install Instrument with 1.5m free space (from widest point) around it.

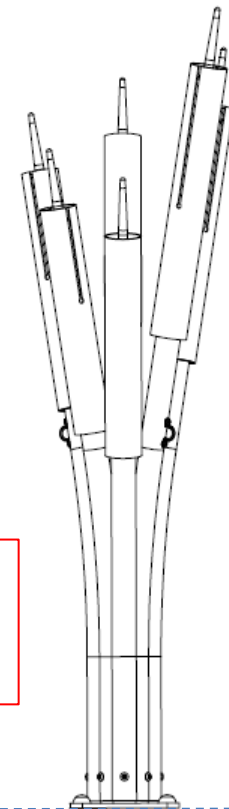

1661mm

**CAUTION:** Frame surface can get hot in direct sunlight, if possible install in shaded areas.

Ground Surface

Ground Anchors not supplied



Spares available from [percussionplay.com](http://percussionplay.com) or from your local distributor

33 Kg